

# 10-57L (2.5-15 USG) Bladder Accumulator 9000/10,000 PSI ASME VIII Division 1 (U Stamped)



## Specification:

9000/10,000 PSI ASME VIII Division 1 Bladder Accumulator (U Stamped)  
 Capacity: 10 to 57 Litre (2.5 to 15 US Gallon)  
 Shell Material: Chromium Molybdenum Alloy Steel  
 Connection Material: Stainless Steel  
 Gas Connection: ¼" BSP Male Gas Valve (316 Stainless Steel)  
 Fluid Connection: See Table Below (Others Available Upon Request)  
 Maximum Working Pressure: 9000 PSI / 10,000 PSI (Appendix 22)  
 Design Pressure: 9000 PSI / 10,000 PSI (Appendix 22)  
 Hydrostatic Test Pressure: Design Pressure x 1.5  
 Metallic Design Temperature: -40°C to +80°C (Standard)  
 Elastomeric Operating Temperature: Various Elastomers Available  
 Design Code: ASME VIII Division 1  
 Approval: U Stamp  
 Dimensions & Weight: See Table Below

## Bladder & Elastomer:

- Available in a range of elastomers to suit operating conditions

## Flushing:

- SAE AS4059 Class 6B-F or NAS 1638 Available
- Medium: Water Glycols & Mineral Oils

## External Coating:

- Special offshore Topside Paint specifications available upon request
- Norsok M501 System Coatings


## Material Certification:

- BS EN 10204-3.1 For major pressure retaining components
- C of C, ASME U1a Form & Process Certification

## Accessories Available:

- Clamps & Brackets (Carbon & Stainless Steel)
- Permanent Charging Blocks (optional burst discs available)
- Fluid Side Safety Blocks (optional relief valves)
- Portable Charging Sets
- Internal Electroless Nickel Plating (ENP)

**BESPOKE ACCUMULATORS AVAILABLE UPON REQUEST**

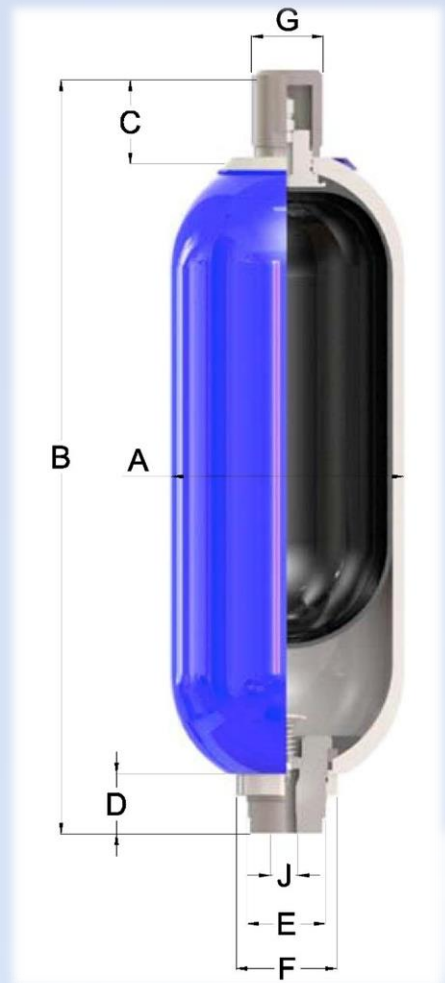

## Permanent Charging Block:

- ¼" BSP Gas Valve Connection
- Burst Disc (Option)
- Various Connections Available

Nominal Capacity (litres)	Gas Volume (litres)	Weight (kg)	Dimensions							
			ø A (mm)	B Max. (mm)	C (mm)	D (mm)	ø E (mm)	ø F (mm)	ø G (mm)	J (NPT)
10.00	9.25	100	267	587	95	58	76	100	70	½"
20.00	18.75	160	267	905	95	58	76	100	70	½"
35.00	35.25	255	267	1429	95	58	76	100	70	½"
50.00	49.25	350	267	1943	95	58	76	100	70	½"
57.00	54.5	360	267	2000	95	58	76	100	70	½"

Contact QHP LTD for more information:

Telephone: +44 (0) 1244 393500

Email : [info@qhp.co.uk](mailto:info@qhp.co.uk)

Website: [www.qhp.co.uk](http://www.qhp.co.uk)